



DROP DECK EXTENDABLES



BUILT STRONGER, TO LAST LONGER

The Strength to weight ratio of Southern Cross Drop Deck Extendable Semi-Trailers provides operators with in-service reliability and a trailer manufactured to cope with Australia's harshest conditions.



Custom Designs



Decks as Low as 900mm

Construction

- High-tensile steel is used extensively throughout the structure to provide maximum strength.
- The entire frame is sand-blasted and prime coated prior to a superior long lasting finish in your companies fleet colours.
- The comprehensive range of suspensions, axles, landing legs, components and fittings are selected for their proven reliability.



Optional Selection of Ramps



Coaming Sockets & Tie Downs




Road Train & HD Options



Various Extension Break Options

Discuss your requirements with our sales staff today.
They will help you gain the best value from your new Southern Cross equipment.

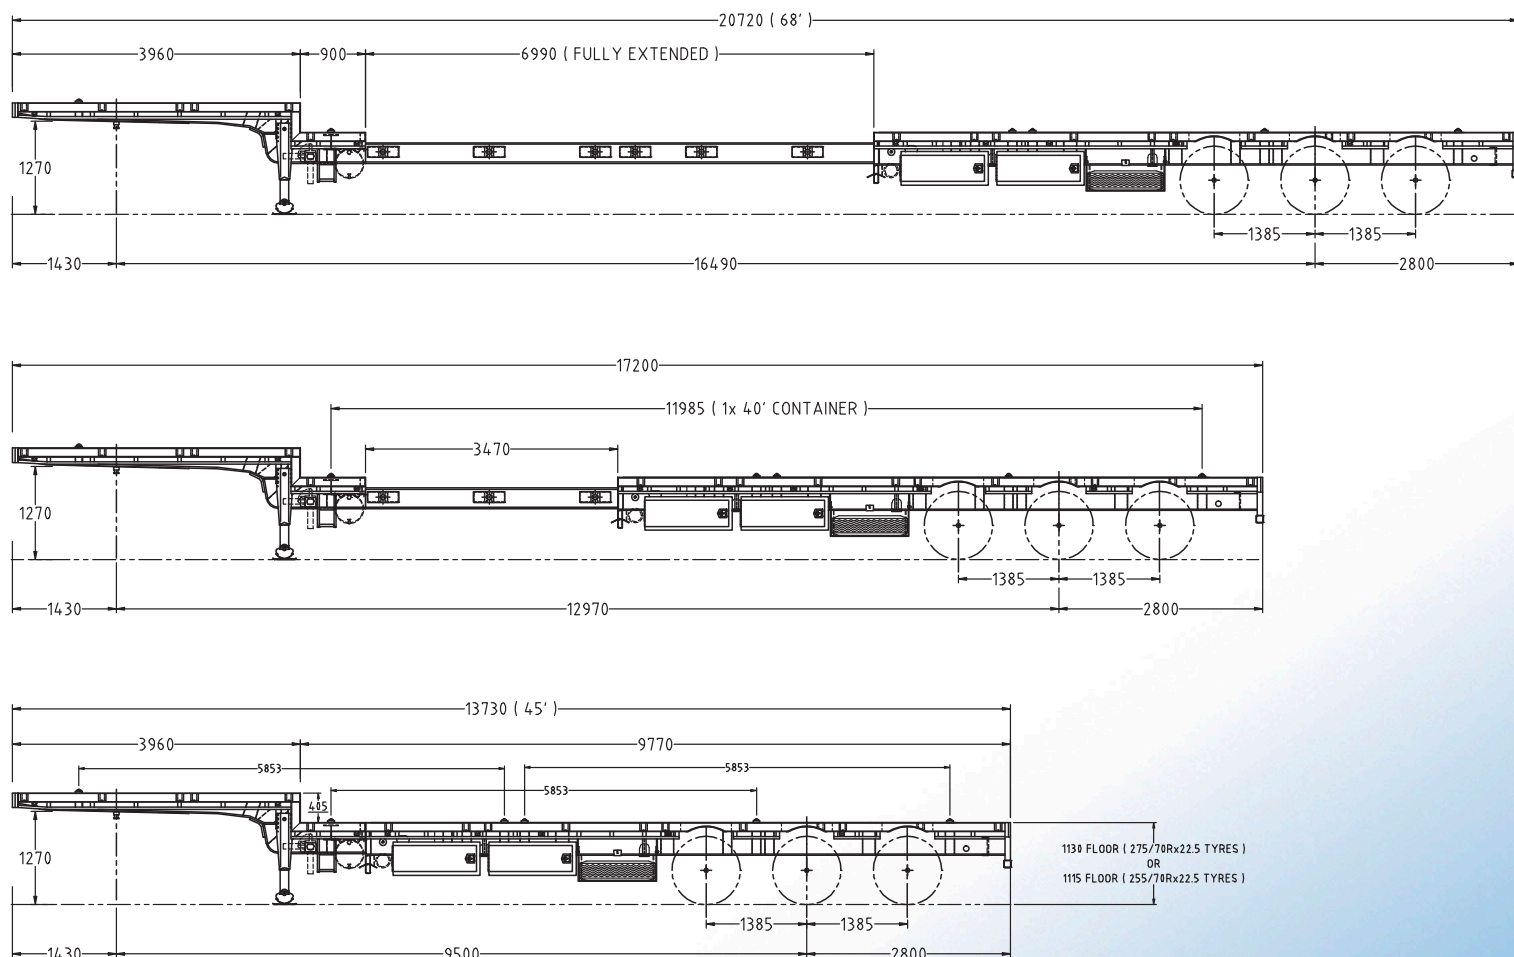

Dimensions

Length	13730mm (45') to 200720mm (68') • Numerous Length Variations & Options Available • Various Extension Break Positions Available
Width	2500 mm
Deck height	Optional Bottom Deck Heights Available from 900mm to 1130mm

Construction

Chassis	Heavy duty - suit road train
Floor	3mm steel chequer plate c/w multiple RHS floor runners
Coaming	5 inch RSJ coamings
Twist Locks	Six (6) rows to suit 1 x 40', 2 x 20' or 1 x 20' laden
Load Racks	Tubular steel fitted front and rear
Winches	Eight (8) sliding winches in track - standard
Tool Box	Two (2) 1200mm toolboxes fitted - standard. Bearer Box fitted to rear of suspension - standard.
Water Tank	60L plastic
Gates	Optional
Road Train	Ringfeder Mount provision & Brake & Electrical connections
Compliance	Road Train, B-Double, B-Triple, OD as required

Running Gear

Suspension	TMC cast Spring suspension standard. Optional : Airbag – Euro II, BPW, SAF
Brakes	ADR brake kit – Drum brakes standard, Optional : Disc brakes and ABS / EBS as required.
Landing Legs	TMC heavy duty landing legs & compensating feet standard
Axles	Standard : K-Hitch 20" Parallel Bearing Axles Optional : 19.5" or 17.5" (15") Axles Optional : BPW Axles
Wheels/Tyres	Full range available as required
Tyre Carrier	Dual Strap Type c/w chains - standard

Electrical

Lights	Narva L.E.D with dual 7 pin & 40 amp plugs standard
--------	---

Paintwork

Coaming, Hubs & Toolboxes	Painted in high quality Glasurit 2 pac paint to clients specified colour
Underside	Hammertone silver standard, 2 pac optional

Warranty

12 months

SCTEG reserves the right to change specification information without notice, and accepts no liability, either direct or indirect for any loss that may result from the application of this information. Photographs may show equipment that is available at extra cost.