



## STEELMAX TIPPER



**BUILT STRONGER,  
TO LAST LONGER**



The Strength to weight ratio of Southern Cross Steelmax Semi Tippers provides operators with in-service reliability and a trailer manufactured to cope with Australia's harshest conditions.



### Construction

- High-tensile steel is used extensively throughout the structure to provide maximum strength.
- The entire frame is sand-blasted and prime coated prior to a superior long lasting finish in your companies fleet colours.
- The comprehensive range of suspensions, axles, landing legs, components and fittings are selected for their proven reliability.



Grain Door Standard



Optional Ringfeder




Spare Tyre Standard



2 Way Tailgate Standard

Discuss your requirements with our sales staff today.  
They will help you gain the best value from your new Southern Cross equipment.

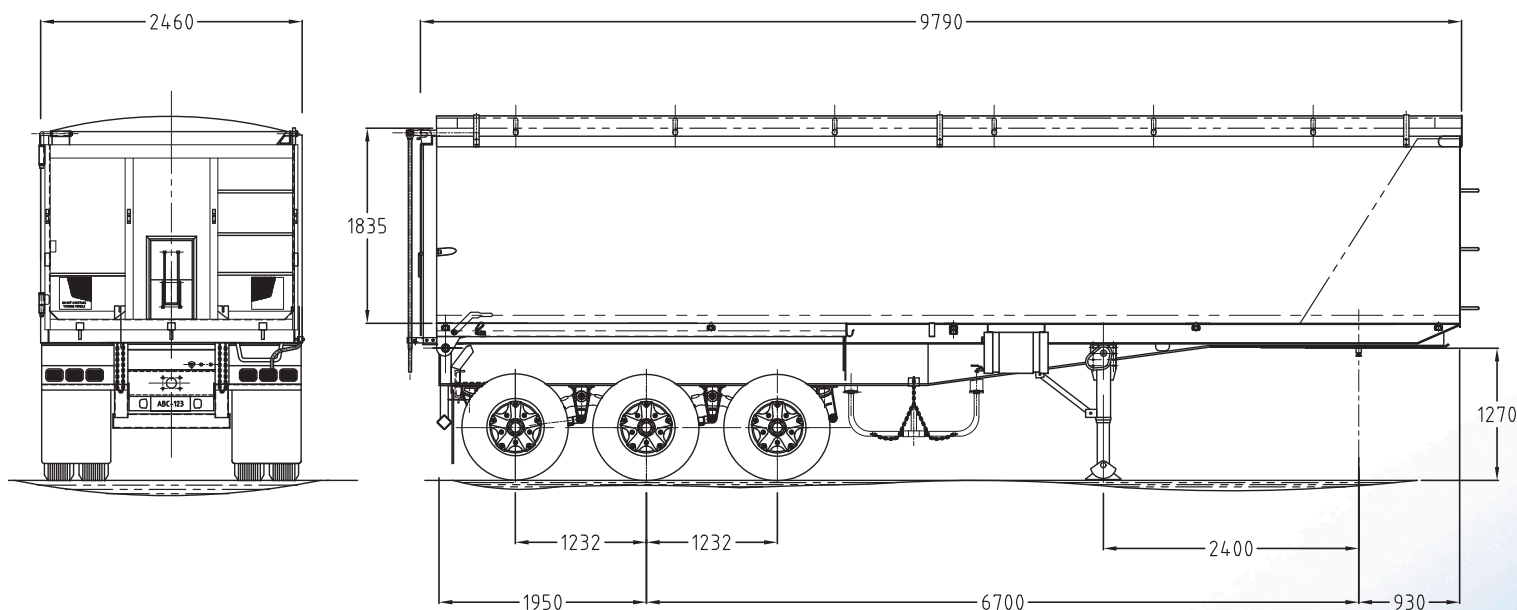

### Dimensions

Length	32" (9750mm) Chassis Tipper
Height	6" (1800mm)
Cubic	47.6m <sup>3</sup>

### Construction

Chassis	Hi Tensile steel chassis, "I" Beam Design.
Floor	5mm Grade 350 Pressed Steel Plate
Walls	3mm Grade HU300 Steel Plate
Rear Door	5mm Top hinge tailgate with grain door, spreader chains, throw over"s & rubber seals
Tarp	Roll tarp on front and rear hoods with telescopic handle and stowage both sides
Ringfeder	Provision ONLY at rear with full road train compliance and all electrical and air lines supplied to rear.
Steps	Access steps standard
Tools	Stowage
Poles	Flip over ridge pole standard
Valve	Line to rear operated from drivers side forward of legs
Hoist	7036mm Stroke x 5 Stage - 52 Tonne Capacity
Hose	Optional Hydraulic Line to Rear
Tool Box	One (1) - 900mm x 400mm x 400mm + T Latches
Water Tank	75 Litre Water Tank - Black Plastic D Shape
Compliance	Road Train compliance

### Running Gear

Suspension	TMC cast Spring suspension standard. <b>Optional :</b> Airbag – Euro II, BPW, SAF
Axles	<b>Standard :</b> K-Hitch 20" Parallel Bearing axles Spoke or 10 Stud <b>Optional :</b> BPW axles
Brakes	ADR brake kit – Drum brakes standard, <b>Optional :</b> Disc brakes and ABS / EBS as required.
Landing Legs	TMC heavy duty landing legs & compensating feet standard
Wheels	Full range available as required
Tyres	13 x 11R22.5 Double Coin RR99 tyres
Tyre Carrier	Dual swinging c/w chains - standard

### Electrical

Lights	L.E.D with top lighting, 6mm front and rear for Road Train & 7 pin standard
--------	---

### Paintwork

Coaming, Hubs & Toolboxes	Painted in high quality Glasurit 2 pac paint to clients specified colour
Underside	2 PAC - BASF Red

### Warranty

12 months

SCTEG reserves the right to change specification information without notice, and accepts no liability, either direct or indirect for any loss that may result from the application of this information. Photographs may show equipment that is available at extra cost.