

Southern Cross Designed & Engineered Imported Road Train Dollies Built to Full ADR Specifications







- High-tensile steel is used extensively throughout the structure to provide maximum strength.
- The entire frame is sand-blasted and prime coated prior to a superior long lasting finish in 2 pac PO Red as standard. Company fleet colours available by prior arrangement.








Discuss your requirements with our sales staff today.

They will help you gain the best value from your new Southern Cross equipment.

Best Under The Southern Cross

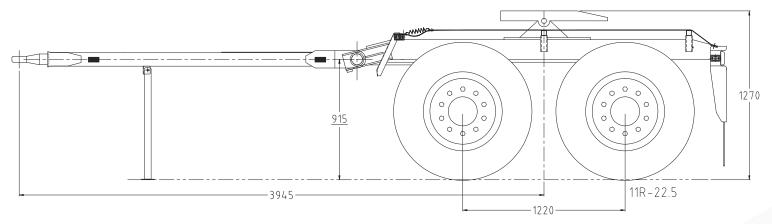

Dimensions	
Length	3945mm Towing Eye to Centre Turntable
Height	Standard Drawbar height 915mm
TT Height	1270mm standard turntable height
Suspension Spread	4'0" (1220mm) standard tandem spread
Construction	
Towing Eye	50mm weld-in towing eye
Compliance	Road Train, B-Double, B-Triple
Electrical	

Running Gear		
Suspension	Fuwa cast Tandem Spring suspension standard.	
Axles	K-Hitch 20" Parallel Bearing Axles with 10 Stud x 285 PCD Hubs.	
Wheels	8 x Steel Silver 10 Stud Wheels	
Tyres	8 x Triangle 11R22.5 Tyres	
Yard Release	Yard Brake Release kit	
Mudguards	Flexiguard Rubber Mudguards & Flaps	
Warranty		

Full LED with dual 7 pin plugs standard



12 months



S.A / NSW / NT

9-15 Manthorpe Street, Dry Creek, SA, 5094 T (08) 8405 7600 E sales@trailers.scteg.com.au

VIC / TAS / ACT

27-31 Thomas Murrell Cres, Dandenong South, VIC, 3175 T (03) 9706 6080 E sales@vans.scteg.com.au

W.A

10 Eva Street, Maddington WA, 6109 T 0419 242 911 E aaron@trailers.scteg.com.au

QLD

182 Tile Street, Wacol, Queensland, 4076 T 0428 125 722 E gregh@scteg.com.au

Lights

Paintwork